

302



PN25

Valvole a sfera maschio/femmina con premi-stoppa in PTFE e O-ring Male/female ball valves with PTFE seal and O-ring



PASSAGGIO TOTALE
FULL BORE



NICKELATE
ESTERNAMENTE
EXTERNALLY
NICKEL-PLATED

Per impianti idrotermosanitari, adatte al consumo di acqua potabile. Installazione in impianti di media pressione di riscaldamento industriale, civile, impianti pneumatici, per fluidi non aggressivi.

For plumbing-heating systems and drinking water consumption. Installation in medium pressure industrial and civil heating systems, pneumatic systems and for non-aggressive fluids.

Pressione di esercizio: 25 bar

Temperatura di esercizio: -20°C +130°C (gelo escluso)

Filetti cilindrici secondo norma ISO 228-1

Tenuta sull'asta:

- 3/8" asta assemblata dall'esterno con premistoppa in PTFE e regolabile con ghiera;
- da 1/2" a 2" asta assemblata dall'interno con 1 OR in EPDM PEROX, premistoppa in PTFE e regolabile con ghiera

Tenuta sulla sfera con 2 sedi in PTFE

Passaggio totale

Working pressure: 25 bar

Working temperature: -20°C +130°C (no frost)


Cylindrical threads according to ISO 228-1

Seal on stem:

- 3/8" stem assembled from outside with PTFE seal and adjustable packing gland;
- from 1/2" to 2" stem assembled from inside with 1 EPDM PEROX OR, PTFE seal and adjustable packing gland.

Seal on the ball with 2 PTFE gaskets

Full bore

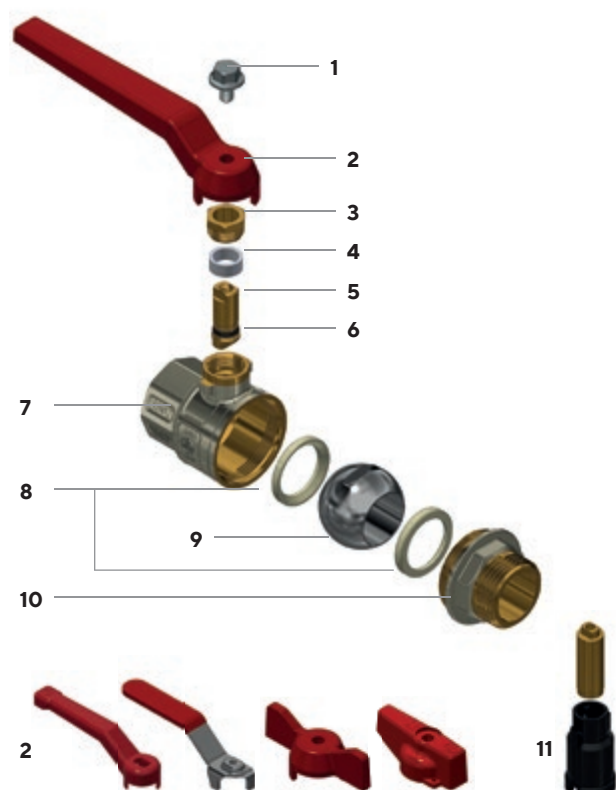


- 1 Vite in acciaio AISI 430 o in Fe-Zn/Bn a seconda dei modelli
- 2 Leve disponibili: vedi tabelle seguenti
- 3 Ghiera in CW614N UNI EN 12164
- 4 Anello premistoppa in PTFE
- 5 Asta in CW614N UNI EN 12164
- 6 O-ring in EPDM PEROX
- 7 Corpo CW617N EN 12165 nichelato solo sulla superficie esterna
- 8 Sede di tenuta in PTFE
- 9 Sfera in CW617N EN 12165 cromata
- 10 Manicotto in CW617N EN 12165 nichelato solo sulla superficie esterna
- 11 Per versioni 1/2" e 3/4" canotto prolunga in plastica PA6 caricata 50% fibra di vetro, per versioni da 1" a 2" in CW617N UNI EN 12165 nichelato

- 1 AISI 430 steel or Fe-Zn/Bn screw, depending on model
- 2 Available levers: see following tables
- 3 CW614N UNI EN 12164 packing gland
- 4 PTFE ring seal
- 5 CW614N UNI EN 12164 stem
- 6 EPDM PEROX O-ring
- 7 CW617N UNI EN 12165 body, nickel-plated on the external surface
- 8 PTFE gasket
- 9 CW617N UNI EN 12165 chrome-plated ball
- 10 CW617N UNI EN 12165 end adaptor, nickel-plated on the external surface
- 11 For 1/2" and 3/4" versions extension made of plastic sleeve PA6 loaded 50% glass fibre, for 1" to 2" versions of nickel-plated CW617N UNI EN 12165





Con leva in alluminio
With aluminium lever

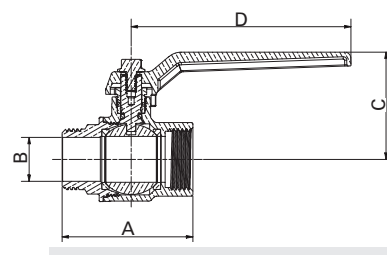


Attacchi Connections	Codice prodotto Product code		PN	A ±1mm	B mm	C mm	D mm	*Conf. num. pezzi *Pack. num. pieces
								
3/8"	302C38G5R	302C38G5B	25	48	11	41	95	-
1/2"	302D12G5R	302D12G5B	25	51	15	43	95	-
3/4"	302E34G5R	302E34G5B	25	56,5	20	46,3	95	-
1"	302F001G5R	302F001G5B	25	68,5	25	61,5	115	-
1" 1/4	302G114G5R	302G114G5B	25	77,5	32	66,7	115	-
1" 1/2	302H112G5R	302H112G5B	25	86,5	40	80,2	165	-
2"	302I002G5R	302I002G5B	25	113,6	50	88,7	165	-

* Per dettagli su confezioni e quantità, contattare l'azienda.

* For details on packaging and quantities, please contact the company.



Con leva in acciaio imbutita
With drawn steel lever

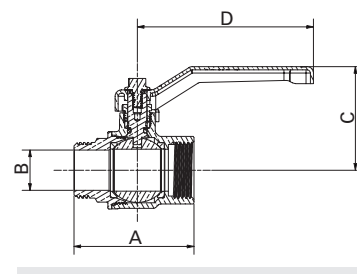


Attacchi Connections	Codice prodotto Product code		PN	A ±1mm	B mm	C mm	D mm	Conf. num. pezzi Pack. num. pieces
								
3/8"	302C38G1R	302C38G1B	25	48	11	44	83	12/144
1/2"	302D12G1R	302D12G1B	25	51	15	45	83	10/120
3/4"	302E34G1R	302E34G1B	25	56,5	20	48	83	8/96
1"	302F001G1R	302F001G1B	25	68,5	25	68	90	4/48
1" 1/4	302G114G1R	302G114G1B	25	77,5	32	73	90	15
1" 1/2	302H112G1R	302H112G1B	25	86,5	40	78	160	10
2"	302I002G1R	302I002G1B	25	113,6	50	90	160	10



Con leva piatta in acciaio INOX AISI 304
With AISI 304 stainless steel flat lever

 **ACQUA POTABILE**
DRINKING WATER

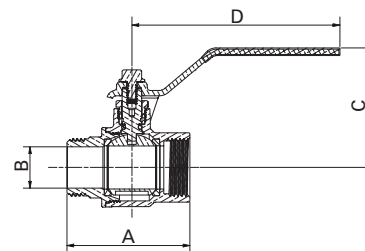


Attacchi Connections	Codice prodotto Product code		PN	A ±1mm	B mm	C mm	D mm	Conf. num. pezzi Pack. num. pieces
								
3/8"	302C38G4R	302C38G4B	25	48	11	41	95	12/144
1/2"	302D12G4R	302D12G4B	25	51	15	43,1	95	12/144
3/4"	302E34G4R	302E34G4B	25	56,5	20	46,3	95	8/96
1"	302F001G4R	302F001G4B	25	68,5	25	59,6	115	3/36
1" 1/4	302G114G4R	302G114G4B	25	77,5	32	64,7	115	15
1" 1/2	302H112G4R	302H112G4B	25	86,5	40	77,7	165	10
2"	302I002G4R	302I002G4B	25	113,6	50	85,7	165	10



Con farfalla in alluminio "T"
With aluminium "T" handle

ACQUA POTABILE
DRINKING WATER




Attacchi Connections	Codice prodotto Product code		PN	A ±1mm	B mm	C mm	D mm	Conf. num. pezzi Pack. num. pieces
								
3/8"	302C38G6R	302C38G6B	25	48	11	37,5	52	12/144
1/2"	302D12G6R	302D12G6B	25	51	15	39,5	52	10/120
3/4"	302E34G6R	302E34G6B	25	56,5	20	42,5	52	8/96
1"	302F001G6R	302F001G6B	25	68,5	25	50,5	65	4/48
1" 1/4"	302G114G6R	302G114G6B	25	77,5	32	55,7	65	15



Con manopola in alluminio
With aluminium knob

ACQUA POTABILE
DRINKING WATER



Attacchi Connections	Codice prodotto Product code		PN	A ±1mm	B mm	C mm	D mm	Conf. num. pezzi Pack. num. pieces
								
3/8"	302C38G2R	302C38G2B	25	48	11	36	31,5	12/144
1/2"	302D12G2R	302D12G2B	25	51	15	39,5	31,5	10/120
3/4"	302E34G2R	302E34G2B	25	56,5	20	42,8	31,5	8/96
1"	302F001G2R	302F001G2B	25	68,5	25	53	42,5	4/48
1" 1/4"	302G114G2R	302G114G2B	25	77,5	32	58,5	42,5	15




Con prolunga e leva in alluminio With extension stem and aluminium lever

Per versioni 1/2" e 3/4" canotto prolunga in plastica PA6 caricata 50% fibra di vetro,
per versioni da 1" a 2" in CW617N UNI EN 12165 nichelato

For 1/2" and 3/4" versions extension made of plastic sleeve PA6 loaded 50% glass
fibre, for 1" to 2" versions of nickel-plated CW617N UNI EN 12165

ACQUA POTABILE
DRINKING WATER

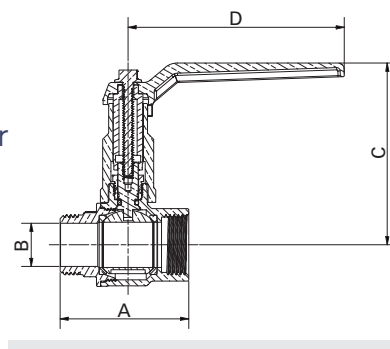

Attacchi Connections	Codice prodotto Product code		PN	A ±1mm	B mm	C mm	D mm	*Conf. num. pezzi *Pack. num. pieces
								
1/2"	302D12G5RFM	302D12G5BFM	25	51	15	76,6	95	-
3/4"	302E34G5RF	302E34G5BF	25	56,5	20	79,9	95	-
1"	302F001G5RF	302F001G5BF	25	68,5	25	99	115	-
1" 1/4	302G114G5RF	302G114G5BF	25	77,5	32	104	115	-
1" 1/2	302H112G5RF	302H112G5BF	25	86,5	40	132,7	165	-
2"	302I002G5RF	302I002G5BF	25	113,6	50	140,7	165	-

* Per dettagli su confezioni e quantità, contattare l'azienda.

* For details on packaging and quantities, please contact the company.




Con prolunga e leva in acciaio imbutito With extension stem and drawn steel lever

Per versioni 1/2" e 3/4" canotto prolunga in plastica PA6 caricata 50% fibra di vetro,
per versioni da 1" a 2" in CW617N UNI EN 12165 nichelato

For 1/2" and 3/4" versions extension made of plastic sleeve PA6 loaded 50% glass
fibre, for 1" to 2" versions of nickel-plated CW617N UNI EN 12165

ACQUA POTABILE
DRINKING WATER

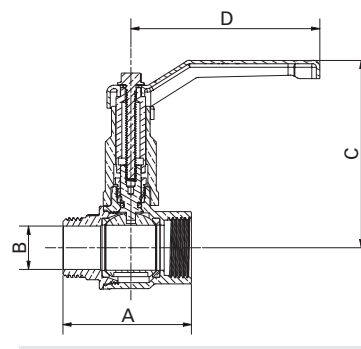

Attacchi Connections	Codice prodotto Product code		PN	A ±1mm	B mm	C mm	D mm	Conf. num. pezzi Pack. num. pieces
								
1/2"	302D12G1RFM	302D12G1BFM	25	51	15	79	83	40
3/4"	302E34G1RF	302E34G1BF	25	56,5	20	82,3	83	30
1"	302F001G1RF	302F001G1BF	25	68,5	25	104,1	90	30
1" 1/4	302G114G1RF	302G114G1BF	25	77,5	32	109,2	90	20
1" 1/2	302H112G1RF	302H112G1BF	25	86,5	40	135,2	160	16
2"	302I002G1RF	302I002G1BF	25	113,6	50	143,2	160	10




Con prolunga e farfalla in alluminio "T" With extension stem and aluminium "T" handle

Per versioni 1/2" e 3/4" canotto prolunga in plastica PA6 caricata 50% fibra di vetro,
per versioni da 1" a 1" 1/4 in CW617N UNI EN 12165 nichelato

For 1/2" and 3/4" versions extension made of plastic sleeve PA6 loaded 50% glass
fibre, for 1" to 1" 1/4 versions of nickel-plated CW617N UNI EN 12165

 **ACQUA POTABILE**
DRINKING WATER



Attacchi Connections	Codice prodotto Product code		PN	A ±1mm	B mm	C mm	D mm	Conf. num. pezzi Pack. num. pieces
								
1/2"	302D12G6RFM	302D12G6BFM	25	51	15	72,9	52	40
3/4"	302E34G6RF	302E34G6BF	25	56,5	20	76,2	52	30
1"	302F001G6RF	302F001G6BF	25	68,5	25	88	65	30
1" 1/4"	302G114G6RF	302G114G6BF	25	77,5	32	93	65	20




Con prolunga e manopola in alluminio With extension stem and aluminium knob

Per versioni 1/2" e 3/4" canotto prolunga in plastica PA6 caricata 50% fibra di vetro,
per versioni da 1" a 1" 1/4 in CW617N UNI EN 12165 nichelato

For 1/2" and 3/4" versions extension made of plastic sleeve PA6 loaded 50% glass
fibre, for 1" to 1" 1/4 versions of nickel-plated CW617N UNI EN 12165

 **ACQUA POTABILE**
DRINKING WATER



Attacchi Connections	Codice prodotto Product code		PN	A ±1mm	B mm	C mm	D mm	Conf. num. pezzi Pack. num. pieces
								
1/2"	302D12G2RFM	302D12G2BFM	25	51	15	73	31,5	40
3/4"	302E34G2RF	302E34G2BF	25	56,5	20	76,3	31,5	30
1"	302F001G2RF	302F001G2BF	25	68,5	25	90,2	42,5	30
1" 1/4"	302G114G2RF	302G114G2BF	25	77,5	32	95,3	42,5	20